



台湾佳贺 TH 系列中空回转油压缸（超高速轻量型）


产品特性:

- 1、超高速，轻量，大孔径型回转油压缸。
- 2、内建逆止阀自锁机构，可防止压力源故障或配管部损伤时，确保压力不致遽降，而能持续稍固的夹持工作物。

型号规格:

型号/规格	活塞面积		行程 MM	最高使用回 转 数 min(r.p.m)	最高使用压 力 MPa	GD ² kg.m ²	重量 kg	总泄漏量 lit./min
	押侧	拉侧						
TH-428	53.2	50.5	10	8000	4.0(40)	0.02	5.8	3.0
TH-536	69.8	67.5	15	8000	4.0(40)	0.05	8.5	3.0
TH-646	97.3	87.9	15	7000	4.0(40)	0.09	13.5	3.0
TH-846	146.8	142.0	20	6200	4.0(40)	0.20	17.2	3.9
TH-852	146.8	136.6	20	6200	4.0(40)	0.20	16.4	3.9
TH-1068	196.2	196.2	25	4700	4.0(40)	0.40	27.0	4.2
TH-1075	196.2	182.0	25	4700	4.0(40)	0.40	25.8	4.2
TH-1291	250.6	234.1	30	3800	4.0(40)	0.61	33.0	4.5
TH-1512	345.4	334.6	30	2800	4.0(40)	1.50	50.0	7.0

尺寸图及参数:

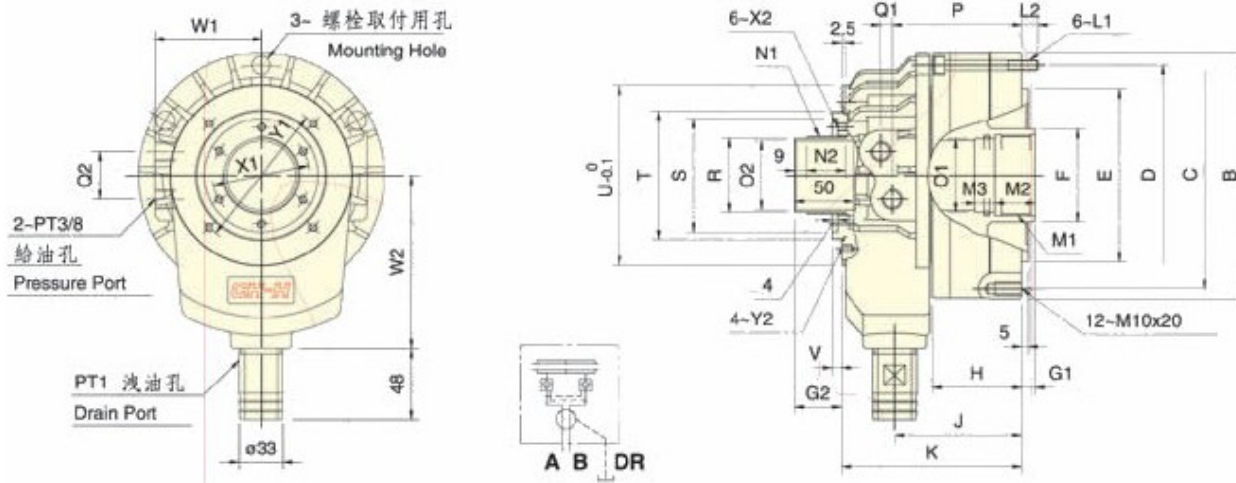



型号/寸法	A 内 径 I.D	B	C	D	E h 7	F	G1		G2		H	J	K	L	M1	M2	N1	N2
							max	min	max	min								
TH-428	90	130	120	100	80	40	10	0	35	25	45	127.5	155	6~M8*15	M33*1.5	25	M34*1.5	26
TH-536	105	150	135	115	100	48	15	0	40	25	47.5	125.5	170. 5	6~M10*20	M42*1.5	25	M44*1.5	28
TH-646	125	169	156	130	100	65	15	0	40	25	60	135.5	193. 5	12~M10*20	M55*2	30	M52*1.5	32
TH-846	150	198	188	170	130	65	20	0	45	25	66	145	198	12~M10*20	M55*2	30	M58*1.5	34
TH-852	150	198	188	170	130	70	20	0	45	25	66	145	198	12~M10*20	M60*2	30	M58*1.5	34
TH-1068	175	225	213	190	160	85	25	0	50	25	62	166.5	231	12~M10*22	M75*2	35	M84*2	40
TH-1075	175	225	213	190	160	95	25	0	50	25	62	166.5	231	12~M10*22	M85*2	35	M84*2	40
TH-1291	205	255	240	215	180	110	30	0	55	25	64.5	180.5	250	12~M12*24	M100*2	35	M99*2	46
TH-1512	250	315	305	275	230	140	30	0	55	25	68	193	273	12~M16*32	M130*2	45	M134*2	46

型号/寸法	Q1 H8	Q2 H8	P	Q1	Q2	Q3	R g 7	S	T	U	V	W1	W2	X1	X2	Y1	Y2
TH-428	30	28	101.5	11	24	PT1/4	32	45	65	88	4	72	105	-	-	76	4~M4*7
TH-536	38	36	119	11	24	PT1/4	42	55	80	98	4	80	110	-	-	83	4~M5*10
TH-646	50	46	127.5	12	30	PT3/8	50	70	95	116	4	98	125	62	6~M4*8	98	4~M5*10
TH-846	50	46	135.5	12	32	PT3/8	56	75	100	128	4	100	130	67	6~M4*8	110	4~M6*10
TH-852	55	52	135.5	12	32	PT3/8	56	75	100	128	4	100	130	67	6~M4*8	110	4~M6*10
TH-1068	70	68	153.5	17	36	PT3/8	81	100	125	158	5	115	160	92	6~M4*8	145	4~M6*10
TH-1075	80	75	153.5	17	36	PT3/8	81	100	125	158	5	115	160	92	6~M4*8	145	4~M6*10
TH-1291	95	91	165	21	34	PT1/2	96	120	142	180	5	136	185	110	6~M4*8	165	4~M6*10
TH-1512	125	120	176.5	23	40	PT1/2	130	160	195	227	6	160	210	171	6~M6*10	215	4~M6*10